






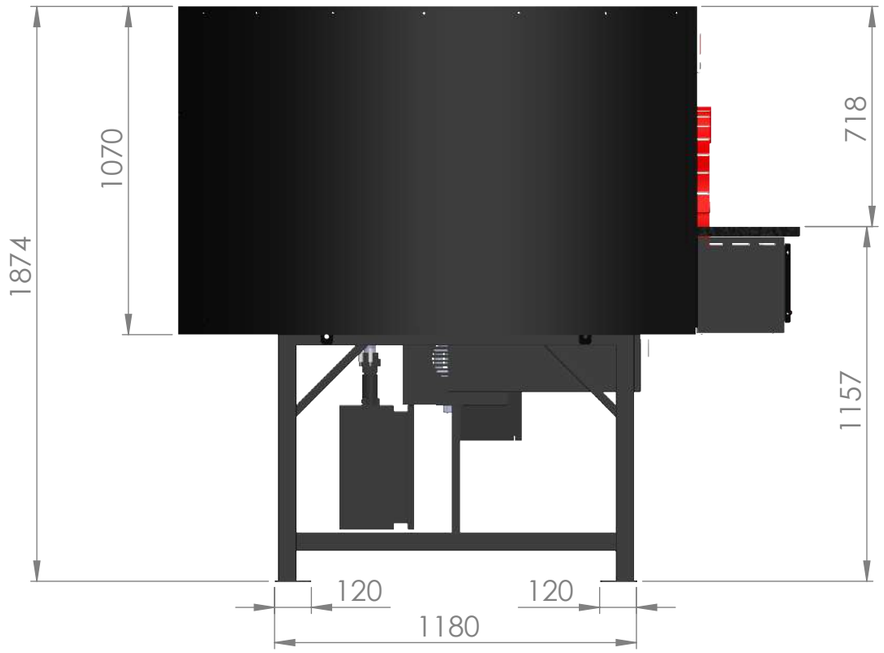

Nominal heating capacity of the Oven	25 Kw
Temperature range of utilizzation	250/470°C
Flue exit diameter	∅ 200 mm.
Flue gas temperature at the manifold	190/270°C
Required extraction Flow	270/290 Nmc/h
ΔP Flue	- 0,4 mmH2O (-3,9Pa)
Electric Power Supply	220/240V - 50Hz - 300W
Gas Pressure Required	Ng- 20 mBar/ Lpg 30 mBar
Required Gas Power	29 Kw
Maximum power of wood's fire	7 Kw

REFRATTARI VALORIANI S.R.L.
Via Caselli alla Fornace 213 -
50066 Reggello (FI) Italia tel. +39-055868069

	NOME	FIRMA	DATA
DISEGNATO	Rapaccini A.		
VERIFICATO	Rapaccini A.		
APPROVATO			
QUALITA'			

Aspected Weight

Kg.1650

FINITURA:

Metal painted graphite

NON SCALARE IL DISEGNO | REVISIONE

TITOLO:

Rotary Oven 120 Standard

N. DISEGNO 20180131 | A3

SCALA:1:20 | FOGLIO 1 DI 1